

Library Sort	Product Specifications	VER	A
Library Name	Li-ion Rechargeable Battery	Date	2009/05/23

# Li-ion Battery Specification

**Model:** Li-ion 9V-500mAh

Prepared	Auditing	Approved
WUYJUN	LVCHENGXUN	GAOPENGKUN
2009.05.23	2009.05.20	2007.05.19


Library Sort	<b>Product Specifications</b>	VER	A
Library Name	<b>Li-ion Rechargeable Battery</b>	Date	2009/05/23

## 1. Primary technical Parameters

<b>Type</b>	Rechargeable Lithium-ion		
<b>Model</b>	Li-ion 9V-500mAh		
<b>Dimension</b>	$(48.7 \pm 0.5) \times (26.2 \pm 0.2) \times (16.7 \pm 0.3)$ mm		
<b>C<sub>5</sub>mAh</b>	500 (mini)		
<b>C<sub>5</sub>mA</b>	500		
<b>Nominal Voltage</b>	8V		
<b>Capacity</b>	Nominal 500mAh Minimum 500mAh when discharged at 0.2C <sub>5</sub> mA to 6V		
<b>Recommended Charging Conditions</b>	0.2C <sub>5</sub> mA charge termination control parameters taper current 0.01C <sub>5</sub> mA at 9V		
<b>Service Life</b>	1000cycles ( $\geq 60\%$ C <sub>5</sub> mAh, 0.2C discharge)		
<b>Weight</b>	< 38.2g		
<b>Charging Voltage</b>	$9 \pm 0.15$ V		
<b>Protection Circuit Module</b>	Over Voltage Limit:	Min 9.00V	Normal 9.15V Max 9.30V
	Under Voltage Limit:	Min 5.00V	Normal 5.15V Max 5.30V
	Over Current Protection:	Min 0.12V	Normal 0.15V Max 0.18V
	Short circuit Test Voltage:	Min VDD-1.2V	Normal VDD-0.9V Max VDD-0.6V
	Max. Quiescent Drain:	0.1Ma	
	ESD Protection:	10 kV	
	Internal resistance:	65 mΩ (max)	
<b>Ambient Temperature Range</b>	Charging :	0~+45°C	
	Discharging :	-20~+60°C	
	Storage :	-20~+40°C	

Subject to change without prior notice

## Dimension

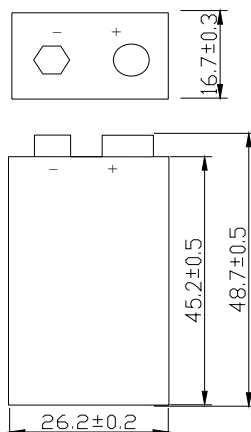

Library Sort	Product Specifications	VER	A
Library Name	Li-ion Rechargeable Battery	Date	2009/05/23

## 2 Polymer Li-ion Battery Pack Characteristics

Test item	Test conditions	Requirements
(1) Outside Appearance	Visual check	No abnormal stain, Deformation nor damage
(2) Standard test conditions	Measurements are carried out at $20 \pm 5^{\circ}\text{C}$ and relative humidity of $65 \pm 20\%$ without other specified condition. Accuracy of voltmeters and ammeters used in test is equal to or better than the grade 0.5.	
(3) Standard charge	Cells shall be charged continuously at the constant current of $0.2C_{5\text{mA}}$ to 9V, then charge at the constant voltage of 9V until the end current of $0.01C_{5\text{mA}}$	
(4) Standard discharge	Cells shall be discharged continuously at the constant current of $0.2C_{5\text{mA}}$ to 6V	
(5) Open-circuit voltage (OCV)		$\geq 8\text{V}$
(6) Rated Capacity	Cells shall be charged in Item (3) and discharged in Item (4) within 10 minutes after full charged. If the discharge duration does not reach the specified value, the test may be repeated up to three times in total.	Rated capacity: $\geq 500\text{mAh}$
(7) Cycle Life (20°C)	Cells shall be charged continuously at the constant current of $0.2C_{5\text{mA}}$ to 8.4V and discharged continuously at the constant current of $0.2C_{5\text{mA}}$ to 5.6V. A cycles defined as one charge and discharge .carry out cycles until discharge capacity $< 60\% C_{5\text{mAh}}$	$\geq 1000$ cycles

Library Sort	Product Specifications	VER	A
Library Name	Li-ion Rechargeable Battery	Date	2009/05/23

### 3 Safety Evaluation :

When Li-ion rechargeable batteries are used on above the permit voltage or current, electrolyte may disassemble, this case will affect safety performance of Li-ion rechargeable batteries. So protection circuit module were used in order to prevent overcharge , over discharge and over current .

#### PCM Model: JZ-DLN-1043V2

Test Item	Test Conditions	Requirements	Requirements
(1) Overcharge	Cells shall be charged in Item 1(3), then charged at 500mA current with a voltage limit of 9.3V. charging is continued for 8 hours.	Protection voltage: $9.3 \pm 0.04V$	No fire, Nor explosion
(2) Over discharge	Cells discharged continuously at the constant current of 500mA to 5.15V, then connect cells terminals with $30 \Omega$ . Discharging is continued for 24 hours	Protection voltage: $5.15 \pm 0.15V$	No fire, Nor explosion
(3) Over current	Cells shall be charged in Item 1(3), then charge current is to be raised at a rate of 0.2A per second until the battery pack is protective cut-off.	Protection current: 1-3A	No fire, Nor explosion
(4) Short Circuit Test	Cells shall be charged in Item 1(3), Connect battery terminals with electric wire ( electric resistance: $0.2 \Omega$ or less ), continued for 1 hours		No fire, Nor explosion

### 4 Duration of Guarantee the Product

We can keep on the quality in six month. In order to keeping on the quality of the batteries, it' s need to charge and discharge once every three months.

### 5 Cell Condition at the Shipment

To be determined (Recommendation Approx.  $\geq 8V$  about 50% charged state)

### 6 Storage

far from the fire and the high temperature.

### 1.8 Handling Precautions

To assure product safety, describe the following precautions in the instruction manual of the equipment.

#### ! Danger

- Do not heat or throw battery into a fire.
- Do not use, leave battery close to fire or inside of a car where temperature may be above

Library Sort	Product Specifications	VER	A
Library Name	Li-ion Rechargeable Battery	Date	2009/05/23

60°C. Also do not charge / discharge in such conditions.

- Hairpins, coins, or screws. Do not store batteries with such objects.
- Do not short circuit the (+) and (-) terminals with other metals.
- Do not place battery in a device with the (+) and (-) in the wrong way around.
- Do not hit with a hammer, step on or throw or drop to cause strong shock.
- Do not disassemble or modify the battery.
- Do not solder a battery directly.
- Do not use a battery with serious scar or deformation.

### ! Warning

- Do not use battery with dry cells and other primary batteries, or batteries of a different package, type, or brand.
- Stop charging the battery if charging is not completed within the specified time.

### During use, charge, or storage.

- Keep away from fire immediately when leakage or foul odor is detected.
- If liquid leaks onto your skin or clothes, wash well with fresh water immediately.

If liquid leaking from the battery gets into your eyes, do not rub your eyes. Wash them well with clean water and go to see a doctor immediately.

### ! Caution

- Store batteries out of reach of children so that they are not accidentally swallowed.
- Batteries have life cycles. If the time that the battery powers equipment becomes much shorter than usual, the battery life is at an end. Replace the battery with a new same one.
- Remove a battery whose life cycle has expired from equipment immediately.
- When the battery is thrown away, be sure it is non-conducting by applying vinyl tape to the (+) and (-) terminals.
- When not using battery for an extended period, remove it from the equipment and store in a place with low humidity and low temperature.
- While the battery pack is charged, used and stored, keep it away from objects or materials with static electric charges.
- The battery can be used within the following temperature ranges. Do not exceed these ranges.  
 Charge temperature range : 0°C to 45°C  
 Discharge temperature range : -20°C to 60°C  
 (When using equipment)